



### DESCRIPTION

Models A-205 gage pressure transducers are manufactured with a unitized stainless steel diaphragm. The advantage of this type of design is that a thin diaphragm and heavy sidewalls are made from one piece of stainless steel. This unitized diaphragm is rugged, but at the same time can be made thin enough to measure low pressures. Available pressure ranges span from 100 psig to 10000 psig. These models can be used in corrosive fluid

environments. Model A-205 has welded electrical connectors as an integral part of the transducer body and recommended for applications involving rough handling or where an all-welded stainless steel transducer is required.

All units have four (4) active bonded strain gages arranged in a Wheatstone-bridge configuration.

### FEATURES

- 100 psig to 10000 psig range
- Flush mount design
- 1/4-18 NPT mounting thread
- Miniature footprint
- Stainless steel
- CE approved



## PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Pressure ranges <sup>3</sup>	100, 150, 200, 300, 500, 750, 1000, 1500, 2000, 3000, 5000, 7500, 10000 psig
Accuracy <sup>2</sup>	0.5 % full scale
Non-linearity and hysteresis	±0.5 % full scale <sup>3</sup>
Non-repeatability	±0.1 % full scale <sup>3</sup>
Output	2 mV/V
Resolution	Infinite

## ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-54 °C to 149 °C [-65 °F to 300 °F]
Temperature, compensated	16 °C to 71 °C [60 °F to 160 °F]
Temperature effect, zero	0.01 % full scale/°F <sup>3</sup>
Temperature effect, span	0.02 % reading/°F <sup>3</sup>

## ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Strained gage type	Bonded foil
Excitation (calibration)	5 Vdc
Excitation (acceptable)	Up to 5 Vdc or (Vac)
Insulation resistance	5000 mOhm @ 50 Vdc
Bridge resistance	350 ohm
Shunt calibration data	Included
Electrical termination (std)	PTIH-10-6P or equivalent (hermetic stainless)
Mating connector (not incl.)	PT06A-10-6S or equiv. (AA111)

## MECHANICAL SPECIFICATIONS

Characteristic	Measure
Media	Gases, liquids compatible with wetted parts
Overload, safe	50 % over capacity
Proof pressure	400 % full scale (max. 20000 psi)
Dead volume	Flush diaphragm (consult factory for charged volume)
Wetted parts material	17-4 PH stainless steel
Weight	2 oz
Case material	Stainless steel

## RANGE CODES


Range Code	Available ranges
BR	100 psi
CJ	150 psi
CL	200 psi
CP	300 psi
CR	500 psi
CT	750 psi
CV	1000 psi
DJ	1500 psi
DL	2000 psi
DN	3000 psi
DR	5000 psi
DT	7500 psi
DV	10000 psi

## OPTION CODES

Range Code	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see <a href="http://sensing.honeywell.com/TMSensor-ship">http://sensing.honeywell.com/TMSensor-ship</a> for updated listings.
Pressure ranges	100, 150, 200, 300, 500, 750, 1000, 1500, 2000, 3000, 5000, 7500, 10000 psi
Temperature compensation	1a. 60 °F to 160 °F 1b. 30 °F to 130 °F 1c. 0 °F to 185 °F 1d. -20 °F to 130 °F 1e. -20 °F to 200 °F 1f. 70 °F to 250 °F 1i. -65 °F to 250 °F 1g. 70 °F to 325 °F 1h. 70 °F to 400 °F
Internal amplifiers	2u. Unamp., mV/V output
Pressure ports	5b. 1/4-18 NPT male
Electrical termination	6a. Bendix PTIH-10-6P (or equivalent) 6 pin (max 400 °F) 6e. Integral cable: Teflon (-65 °F to 475 °F) 6h. Integral cable: Silicone (-65 °F to 300 °F) 6i. Integral underwater cable: (max 180 °F) 1 6v. Phoenix connector on end of cable
Special calibration <sup>4</sup>	9a. 10 point (5 up/5 down) 20 % increments @ 70 °F 4 9b. 20 point (10 up/10 down) 10 % increments @ 70 °F 4
Wetted diaphragm	10e. Inconel X-750
Shock and vibration	44a. Shock and vibration resistance




MOUNTING DIMENSIONS AND CHARACTERISTICS

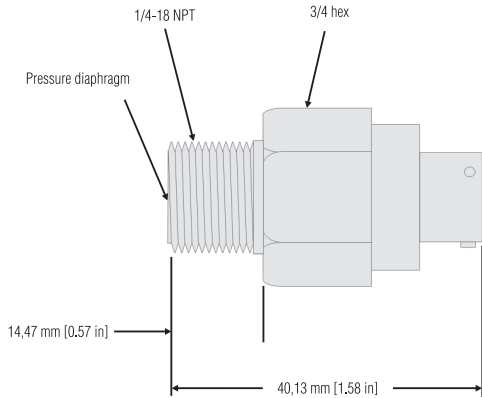

For reference only

TYPICAL SYSTEM DIAGRAM

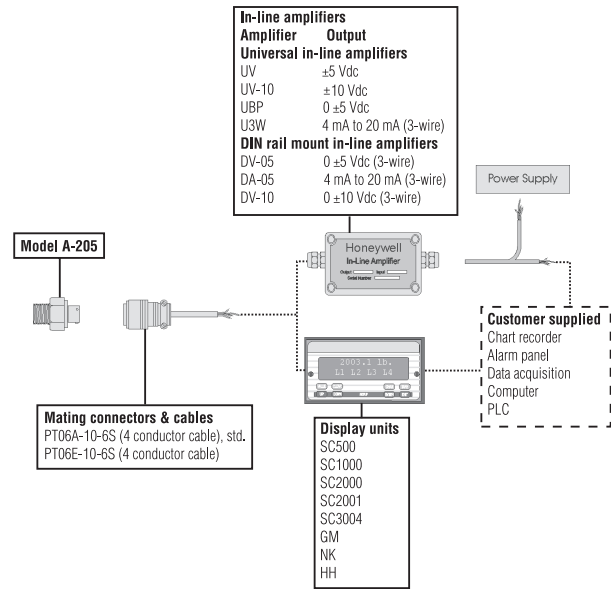

WIRING CODES

Connector	Connector, unamplified
A	(+) excitation
B	(+) excitation
C	(-) excitation
D	(-) excitation
E	(-) output
F	(+) output

Model A-205

NOTES

- Not available with option 1e, 1f, 1g, 1h or 1i.
- Accuracies stated are expected for best-fit straight line for all errors, including linearity, hysteresis & non-repeatability thru zero.
- For ranges less than 100 psi, consult factory for specifications.
- Not available for all ranges.

**WARNING**  
**PERSONAL INJURY**

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

**WARNING**  
**MISUSE OF DOCUMENTATION**

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.