
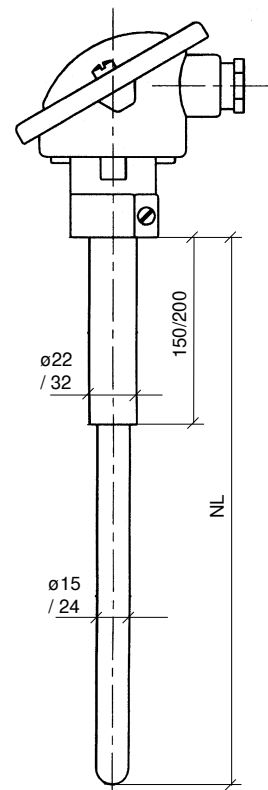


- für Ofenbau und Abgasmessungen / for stove construction and exhaust gas measurement / pour construction de four et mesurage de gaz de combustion
- Anschlusskopf Form A / Connection head form A / Tête de raccordement forme A
- Mit Schutzrohr aus feuerbeständiger Keramik und Metallhalterrohr zur Montage mittels Verschraubung oder Anschlagflansch / with thermowell made of fire-resistant ceramic and metal holding tube for mounting with screws or flange / avec gaine de protection en céramique feu-résistant et tube en métal pour montage à vis ou à bride



Bestelldaten / order specifications / spécifications de commande:

Messeinsatz / sonde:

- | | | | | |
|-------------------|--|--|--|-----------------------------------|
| Werkstoff: | <input type="checkbox"/> C610 Keramik | <input type="checkbox"/> C799 Keramik | <input type="checkbox"/> _____ | |
| Länge-NL: | <input type="checkbox"/> 350 mm | <input type="checkbox"/> 500 mm | <input type="checkbox"/> 710 mm | <input type="checkbox"/> _____ mm |
| Diameter: | <input type="checkbox"/> 9 mm | <input type="checkbox"/> 15 mm | <input type="checkbox"/> 24 mm | <input type="checkbox"/> _____ mm |
| Sensor: | <input type="checkbox"/> 1xK (NiCr-Ni) | <input type="checkbox"/> 1xS (Pt-PtRh10) | <input type="checkbox"/> 1xB (PtRh-PtRh) | <input type="checkbox"/> KL 1 |
| | <input type="checkbox"/> 2xK (NiCr-Ni) | <input type="checkbox"/> 2xS (Pt-PtRh10) | <input type="checkbox"/> 2xB (PtRh-PtRh) | <input type="checkbox"/> KL 2 |
| | <input type="checkbox"/> andere/others | <input type="checkbox"/> _____ | <input type="checkbox"/> _____ | |

Optionen / options:

Schutzrohr / thermowell / gaine de protection (Standard: 1.4571)

- | | | |
|--|-------------|--------------------------|
| ZMG Klemmverschraubung / threading / raccord visse | Code G3/4 " | <input type="checkbox"/> |
| | Code G1 " | <input type="checkbox"/> |
| | andere | <input type="checkbox"/> |